SDF – Fixed Pattern Slot



The Holyoake CSDF Fixed Pattern Slot Diffuser is designed with the factory set pattern blades and frame, to provide an aesthetically pleasing design to suit contemporary building interiors, whilst providing unobtrusive, draughtless air distribution over a wide range of airflows.

The unique diffuser construction provides an excellent ceiling effect and is particularly suitable to variable volume applications where horizontal throws are required.

A range of handing options are available to suit various throw requirements.

Construction

Extruded aluminium continuous or discrete length linear slot diffusers. Utilising standard CSD 19 or 25 construction components and optional mounting frame in conjunction with a specifically designed 'factory set' fixed pattern profile extrusion.

Features

- Available in one to eight slots with two slot widths (19 and 25).
- Excellent aesthetics, with specifically designed profile.
- Bi-directional (can be factory assembled for left and/or right hand throws).
- Incorporates standard CSD construction components and mounting frame configuration.
- Mitred corners if required.
- Square ends only.


Guide Product Weights	
Model	Approximate Weight in Kg per metre
CSDF 25 2 Slot	2.5

Notes

- 1. Only available as CSDF 19 or 25.
- 2. Use CSD horizontal performance data.
- 3. Refer to your local Holyoake branch for special site requirements.
- 4. Seismic restraints required but not supplied.








Horizontal - Left, 1 - Directional Illustrated.

CSDF – Fixed Pattern Slot

Diffuser Description Code Examples and Suggested Specifications

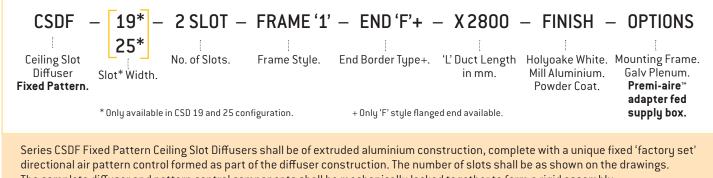

The complete diffuser and pattern control components shall be mechanically locked together to form a rigid assembly. CSDF Slot diffusers shall be provided with matching Adapters, or Plenums and suitable Mounting Frame where shown.

All shall be as manufactured by Holyoake.