

CSDL – Fixed Pattern Slot

Model: **CSDL**

Single or Multi-slot Ceiling Diffuser

CSDL - 19 (19mm SLOTS)

CSDL - 25 (25mm SLOTS)

Extruded aluminium continuous or discrete length linear slot diffusers to suit modern interiors, while providing unobtrusive draughtless air distribution over widely ranging airflows.

Particularly suited to variable volume applications and ideal for perimeter supply in major commercial buildings.

Features


- Available in one to eight slots with two slot widths.
 - Factory fixed black or white polymer snap-in pattern control provides, at reduced cost, left or right ceiling effect only.
 - CSD-MF mounting frame available for ease of installation and high standard finish.
 - For use with diffuser adapter CSDA/I, plenum supply, or linear duct.
 - Alignment strips and four end types to suit discrete or continuous lengths.
 - Up to 2.8 metres single piece length.
- For factory fixed black or white polymer pattern control, specify CSDL or CSEDL.

Guide Product Weights

Model	Approximate Weight in Kg per metre
CSDL 25 2 Slot (inc Mounting Frame)	4.51

Due to a policy of continuous development and improvement the right is reserved to supply products which may differ slightly from those illustrated and described in this publication.

Typical CSDL Section and Available Throw Options

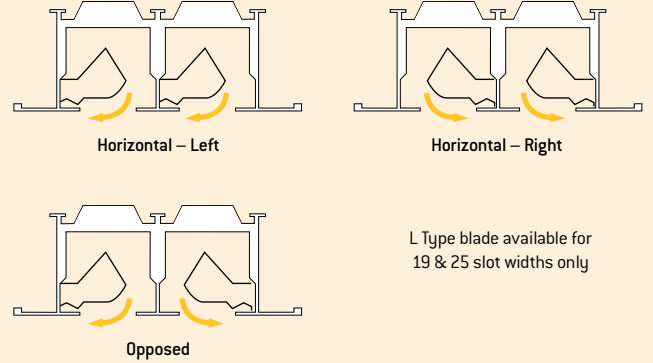

Notes

1. Only available as CSDL-19 and CSDL-25.
2. Use CSD horizontal performance data.
3. Use CSD dimensional data.

Diffuser Description Code Examples and Suggested Specifications

CSDL – **19+** – 2 SLOT – FRAME '2' – END 'F' – X 2800 – FINISH – OPTIONS
CSEDL* – **25+**

Ceiling Slot Diffuser	Slot Width.	No. of Slots.	Frame Style.	End Border Type.	'L' Duct Length in mm.	Holyoake White. Mill Aluminium. Powder Coat.	Mounting Frame. Galv Plenum. Premi-aire™ adapter fed supply box.
Fixed Limited Pattern 'Snap In'							

* E Denotes curved Flange. + 'L' type 'Snap - in' blade only available on CSD / E 19 and CSD / E 25.

Series CSDL Ceiling Slot Diffusers shall be of extruded aluminium construction, complete with 'limited snap in' fixed air pattern control. The number of slots shall be as shown on the drawings and the slot components shall be mechanically locked together to form a rigid assembly. Pattern controls shall be readily removable through the slots and shall be finished matt black. CSDL slot diffusers shall be provided with matching adapters or plenums and suitable mounting frame where shown. All shall be as manufactured by Holyoake.